

# EVOLVEO

## Salvarix


### indoor flash siren

#### 1. System introduction & features

- Fashionable outlook design
- Alarming with sound and flashing light
- Wireless easy connection
- Rotational led lights
- Arm/disarm can choose with siren sound or not
- Alarming led with 2 selectable flashing modes

#### 2. Indicating diagram

1

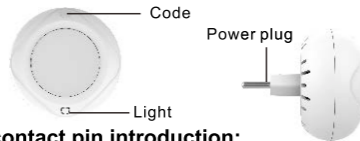

#### J1 contact pin introduction:

- H1 short: choose flashing mode 1 (flashing red, factory default)
- H2 short: Arm/disarm with siren sound (factory default)
- L1 short: choose flashing mode 2 (flashing red and blue rotationally)
- L2 short: Arm/disarm without siren sound, blue light flashing

**Pairing button:** pairing button can set the siren working mode and carry out pairing, delete such operations.

2

#### 3. Used as spot alarm system

##### System power on

Power on the siren, blue LED light flashing once with a di sound.

##### Pair more sensors

Press pairing button under standby state, after di sound enter pairing status, then can trigger any wireless accessories to emit signal, siren make a di sound indicate successful pairing, two di sound means this accessory paired before.

##### Retreat pairing

Press pairing button under pairing status, after a di sound siren LED light off, system retreat from pairing status. Meanwhile no any operation within 30 second system will retreat automatically.

3

#### 4. Delete paired sensors

Press Pairing button until a di sound heard, keep press until two didi sound and until four didididi sound heard, then release the button, all paired sensors will be deleted.

**Note:** JD-11 default works with 433MHz frequency wireless accessories.

#### 5. Used as alarm system accessory siren

Connect wireless transmitter with alarm panel first (inbuilt transmitter also ok)  
Pairing: under Pairing status, press any key of the alarm system remote control, connected transmitter will emit signal, details see 3. 2 chapter.

4

#### 6. Colored led lights

Press Pairing button under standby status, until a di sound heard, keep press until two didi sound heard, then release the button, siren enter colored lights status, LED lights will change from red/ orange/yellow/ green/blue/purple/white, then flash in orange.

#### 7. Operate guide

This Siren can work with any alarm system panel of our company.

**Alarming:** under arm status, siren will make alarming sound immediately after receiving alarming signals from paired sensors.

5

**Stop alarming:** press the disarm button of connected remote control, siren will stop alarming.

#### 8. Technical parameters

Power	100~230Vac 50Hz/60Hz
Frequency	315MHz/433MHz(Optional )
Distance	≥80M(no obstacle )
Environment	0~40℃ humidity: ≤90%
Volume	≥80dB/3M
In-built 5050 led Flashing light	
Wireless sensors	≤100 pcs
Receiving code	ASK

[www.evolveo.com](http://www.evolveo.com)

6