

Seznam certifikovaného HW Supermicro a Tyan pro VMware

SUPERMICRO[®]



TYAN



Blade systémy pro 2 x Quad Core Intel Xeon 5000

SBI-7125C-S3

[Abacus server - SuperBlade 710E](#)

SBI-7125C-S3+

[Abacus server - SuperBlade 710E](#)

SBI-7125W-S6

[Abacus server - SuperBlade 710E](#)



1U servery pro 2 x Quad Core Intel Xeon 5000

- ❑ SuperServer 1025C-3
[Abacus server i-1420F-M3](#)
- ❑ SuperServer 1025C-M3
[Abacus server i-1420F-M3](#)
- ❑ SuperServer 1025W-URB
[Abacus server i-1420F-M3](#)
- ❑ SuperServer 6015B-UB
[Abacus server i-1420U-M3](#)
- ❑ SuperServer 6015B-URB
[Abacus server i-1420U-M3](#)
- ❑ SuperServer 6015C-M3B
[Abacus server i-1420Q-M3V](#)
- ❑ SuperServer 6015TC-TB
[Abacus server i-1420T-M3](#)
- ❑ SuperServer 6015TW-INF
[Abacus server i-1420T-M3](#)
- ❑ SuperServer 6015V-M3B
[Abacus server i-1420Q-M3](#)



2U servery pro 2 x Quad Core Intel Xeon 5000

- SuperServer 6025B-TB
[Abacus server i-2420T-M3](#)
 - SuperServer 6025B-URV/B
[Abacus server i-2420T-M3](#)
 - SuperServer 6025W-NTR+
[Abacus server i-2420Q-M3](#)
 - SuperServer 6026T-URF
 - SuperServer 6026T-NTR+
 - Tyan TA26 B5397T26W8H
-



3U servery pro 2 x Quad Core Intel Xeon 5000

- ❑ SuperServer 6035B-8RV/B
- ❑ SuperServer 6035B-8R+V/B



4U/Tower servery pro 2 x Quad Core Intel Xeon 5000


- ❑ SuperServer 7045A-C3B
[Abacus server i-T320T-M3](#)
- ❑ SuperServer 7045B-TR+B
[Abacus server i-2420T-M3](#)



2U servery pro 4 x Quad Core Intel Xeon 7000

□ SuperServer 8025C-3RB


[Abacus server i-2440Q-M2](#)

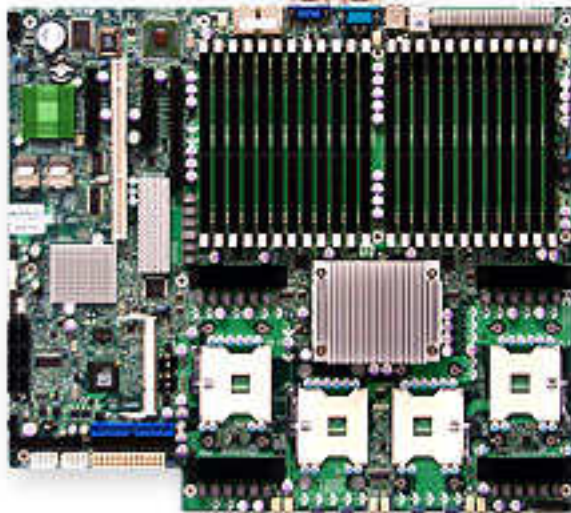

4U/Tower servery pro 4 x Quad Core Intel Xeon 7000

□ SuperServer 8045C-3RB

[Abacus server i-2440Q-M2](#)

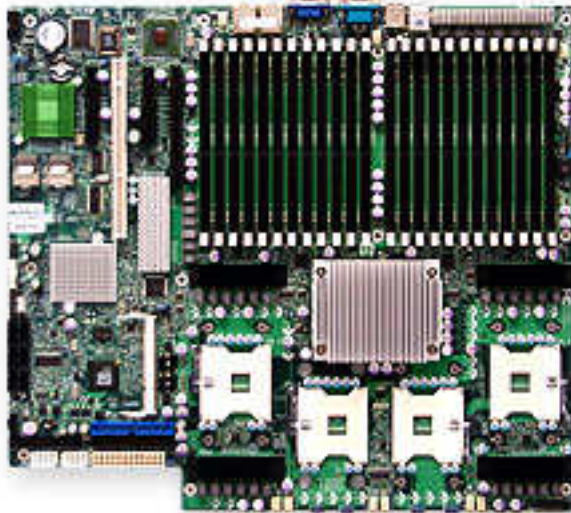

2U servery pro 2 x Quad Core AMD Opteron 2000


- ❑ SuperServer 2021M-32R
[Abacus server a-2620Q-M2](#)
- ❑ SuperServer 2021M-UR+V/B
[Abacus server a-2620F-M2](#)



2U servery pro 4 x Quad Core AMD Opteron 8000

□ SuperServer 2041M-32R+B

[Abacus server a-2660T-M2](#)

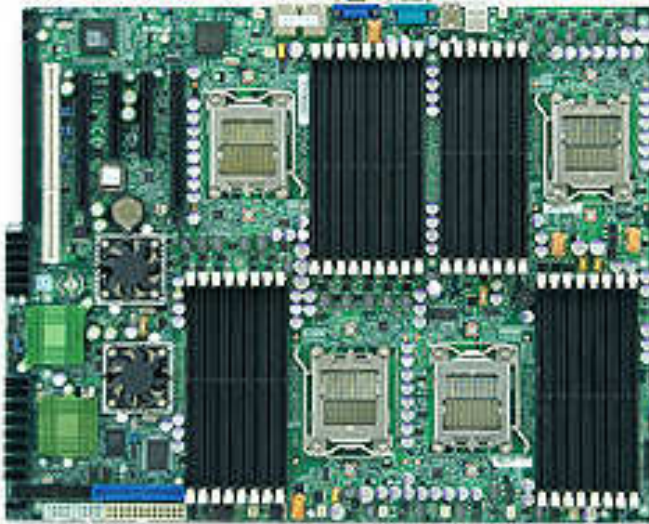

Ostatní certifikované příslušenství

- ❑ Supermicro UTG-I2
(2x 10GigaLAN GX4,UIO,Intel82598EB,iSCSI)
- ❑ Supermicro STG-I2
(2x 10GigaLAN GX4,PCI-E8(g2]-LP,Intel82598EB,iSCSI)
- ❑ Supermicro SG-I4
(4GbE,PCI-E8-LP,2xIntel82576,iSCSI boot,jumbo fr,VMw)
- ❑ Supermicro SG-I2
(2GbE,PCI-E4-LP,Intel82576,iSCSI boot,jumbo fram,VMw)

