

EVOLVEO

Dion 1, Dion 2

www.evolveo.com

ÚVOD

Dion 1 a Dion 2 Dual SATA dokovací stanice/samostatný duplikátor je všestranná a praktická jednotka. Plní funkci jak dokovací stanice, tak volně stojícího HDD a SSD duplikátoru. Podporuje SATA 2.5" a 3.5" jednotlivé pevné disky až do velikosti 2TB a 8TB. Zařízení má LED lištu signalizující průběh operace, tlačítko pro zálohování a také pro kopírování obsahu. Je vybaveno jednoduchým USB 3.0 a 3.1 rozhraním. Dion je kompatibilní s operačními systémy Windows 10/8/7, Vista, XP, 2000, Mac a Linux.

Před použitím tohoto zařízení si pozorně přečtěte návod k použití.

VLASTNOSTI / TECHNICKÉ ÚDAJE

Dion 1

- Podpora jednoho či dvou SATA disků najednou
- Podpora SATA 6G rozhraní s podporou UASP
- Praktický a moderní design
- Kompatibilní s USB 3.0, 5Gbps
- Podpora high speed USB 2.0 (480 Mb/s), USB 1.1 (12 Mb/s), USB 1.0 (1,5 Mb/s)
- Jednoduchá instalace Plug & Play a Hot-Swappable
- LED lišta
- Funkce Zálohování (One Touch Backup) nebo Kopírování (Duplicate) obsahu
- Funguje i jako volně stojící HDD a SSD duplikátor
- Vytváří kopii disku 1:1
- Rozměry: 129 (D) x 96 (Š) x 72 (V)

Dion 2

- Kompatibilní s USB 3.1, 10Gbps

SYSTÉMOVÉ POŽADAVKY

PC

- Minimálně Intel procesor Pentium II/50MHz, 64MB RAM
- Windows 2000 / XP / VISTA/ 7/8/10
- Funkční USB port

MAC

- Minimálně Apple G procesor, 64MB RAM
- Mac OS 9.1, 9.2, 10.1.5, 10.2, 10.3 nebo vyšší
- Funkční USB port

OBSAH BALENÍ

EVOLVEO Dion 1 nebo EVOLVEO Dion 2


Napájecí zdroj

Uživatelská příručka

Kabel USB 3.0 typ B – USB 3.0 typ A, 5Gbps (Dion 1)
nebo

Kabel USB 3.1 typ B – USB 3.1 typ A a USB adaptér A-C,
10Gbps (Dion 2)

Nastavení hardwaru

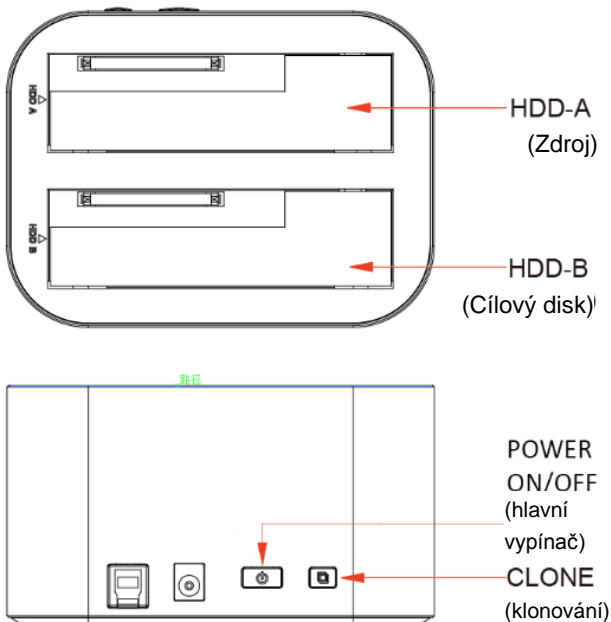

Režim zařízení (USB 3.0 nebo USB 3.1 k Dual SATA externímu hardwaru)

- Zapojte váš SATA hard disk do zdířky dokovací stanice.
- Pomocí USB kabelu připojte dokovací stanici k počítači.
- Připojte ke stanici napájecí zdroj a zapněte ji.
- Počítač by měl nový hardware rozpoznat automaticky.

Pro Windows2000/XP/VISTA/7/8/10 není ruční nastavení nutné.

- Aby mohla být dokovací stanice naformátována, přejděte rovnou ke kroku 6.

Kopírování

Vložte 2 hard disky do dokovací stanice. Ujistěte se, že jste disk s daty, která chcete kopírovat (Zdroj/Source) vložili do vstupu pro zdroj. Cílový disk (Target) by měl mít stejnou nebo větší kapacitu než disk zdrojový.

Připojte ke stanici napájecí zdroj a stiskněte hlavní vypínač.

Po cca 10 vteřinách podržte tlačítko pro klonování (CLONE) na 3 vteřiny. Dojde k zahájení kopírování. Rozsvítí se ukazatel průběhu kopírování (4 fáze kopírování: 25 %, 50 %, 75 % a 100 %). Zobrazí se:

	LED lišta			
Fáze kopírování	25 %	50 %	75 %	100 %
Barva	Zelená	Červená	Žlutá	Oranžová
Začátek kopírování	Lišta se rozsvěcuje postupně po každých 25 %			
Průběh kopírování	LED lišta se pohybuje tam a zpět			
Kopírování je dokončeno	Celá LED lišta svítí			

Poznámka:

- V režimu duplikace nelze připojit dokovací stanici k počítači přes USB kabel.
- Duplikovaný disk též přebírá ID disku hlavního. Pokud jsou oba disky i po dokončení duplikace připojeny do dokovací jednotky, systém Windows 7/8/10 jeden z disků vypne. Hard disk lze znovu spustit online přes "Správu disků".

Formátování hardwaru

(Pokud se hardware již objevil ve složce "Tento počítač", přejděte rovnou ke kroku 2.)

- 1) Nová a nenaformátovaná jednotka se běžně ve složce "Tento počítač" nezobrazí automaticky napoprvé. Postupujte podle následujících kroků:
 - Windows 2000/XP/VISTA/7/8/10
 - Stiskněte pravé tlačítko myši, zvolte "Tento počítač", v seznamu vyberte "Správce disků".
 - Zobrazí se operační rozhraní a seznam disků.

Pozor:

U operačních systémů Windows 2000/XP/VISTA/7/8/10 zvolte NTFS formát. Pokud je kapacita nižší než 32GB, můžete zvolit formát FAT32.

- 2) Přejděte na "Tento počítač", vyhledejte vyměnitelný disk, na ikonu disku klikněte pravým tlačítkem myši a v rozevíracím seznamu vyberte "formát" a dále postupujte podle pokynů pro dokončení procesu formátování.

Poznámka: Tímto způsobem naformátujete disk jako jeden samostatný oddíl s největší možnou kapacitou.

FAQs:

Otázka: Ve složce "Tento počítač" nemohu hardware najít, proč?

Odpověď: Ujistěte se, že byl nový pevný disk rozdělen.

Otázka: Po zapojení do USB portu hardware vůbec nefunguje, proč?

Odpověď: USB kabel není správně zapojen.

Otázka: Proč je po nainstalování hardware stále označen jako "Neznámé zařízení"?

Odpověď: To znamená, že instalace neproběhla úspěšně. Zkuste tedy hardware nainstalovat ještě jednou.

Otázka: Mohu použít externí USB hub?

Odpověď: Ano, externí USB hub funguje stejně jako vestavěné USB porty.

Otázka: Můj počítač nemá USB port 3.0. Mohu použít hostitelský adaptér pro USB 3.0?

Odpověď: Ano, hostitelský adaptér funguje stejně jako vestavěné porty.

Záruka se NEVZTAHUJE na:

- používání zařízení pro jiné účely, než ke kterým je navrženo,
- instalaci jiného firmwaru než toho, který byl do zařízení instalován výrobcem, nebo toho, který lze stáhnout ručně či automaticky z nabídky zařízení,
- mechanické poškození způsobené nesprávným zacházením nebo přírodními živly (ohněm, vodou, statickou elektřinou, přepětím atd.),
- škody způsobené opravami prováděnými nekvalifikovanou osobou,
- poškození záruční pečeti nebo na nečitelné výrobní číslo zařízení.



Likvidace: Symbol přeškrtnutého kontejneru na výrobku, v přiložené dokumentaci či na obalech znamená, že ve státech Evropské Unie musí být veškerá elektrická a elektronická zařízení, baterie a akumulátory po skončení jejich životnosti likvidovány odděleně v rámci tříděného odpadu. Nevyhazujte tyto výrobky do netříděného komunálního odpadu.

  **PROHLÁŠENÍ O SHODĚ**

Tímto společnost ABACUS Electric, s.r.o. prohlašuje, že výrobky EVOLVEO Dion 1 a Dion 2 splňují požadavky norem a předpisů, které jsou relevantní pro daný typ zařízení.

Plné znění Prohlášení o shodě naleznete na <ftp://ftp.evolveo.com/ce>

Copyright © ABACUS Electric, s.r.o.

www.evolveo.com

www.facebook.com/EvolveoCZ

Všechna práva vyhrazena.

Konstrukce a technická specifikace výrobku se mohou změnit bez předchozího upozornění.

INTRODUCTION

The Dion 1, Dion2 Dual SATA Hard Drive Dock/Stand-Alone Duplicator is a versatile, practical unit that functions as both a hard drive dock and stand-alone HDD and SSD duplicator. This device supports SATA 2.5-inch and SATA 3.5-inch hard drives, up to 2TB and 8TB respectively. It also features the LED progress indicator, One Touch Backup or Duplicate button. It is also designed with a straightforward, uncomplicated USB 3.0 or USB 3.1 plug-and-play interface. The Dion is compatible with Windows 10/8/7, Vista, XP, 2000, Mac and Linux operating systems.

Please read this manual carefully before using this device.

FEATURES / SPECIFICATIONS

Dion 1

- Supports any SATA drive or even two drives at one time
- Supports SATA 6G interface with UASP
- Standable Convenient and Trendy Design
- Supports USB 3.0, 5Gb/s
- Complies with USB 2.0 high speed (480Mb/s), USB 1.1(12Mb/s), USB 1.0 (1.5Mb/s)
- Easy installation plug & play and hot-swappable
- LED progress indicator
- Supports One Touch Backup or Duplicate
- Functions as a stand alone HDD and SSD duplicator
- Delivers a 1-to-1 clone equal to or greater in size than original
- Dimensions: 129 (L) x 96(W) x 72(H)

Dion 2

- Supports USB 3.1, 10Gb/s

SYSTEM REQUIREMENT

PC Requirements

- Minimum Intel Processor Pentium II/50MHz, 64MB RAM
- Windows 2000 / XP / VISTA/ 7/8/10
- Active USB port

MAC Requirements

- Minimum Apple G processor, 64MB RAM
- Mac OS 9.1, 9.2, 10.1.5, 10.2, 10.3 or above
- Active USB port

PACKAGE CONTENTS

EVOLVEO Dion1 or EVOLVEO Dion 2

Power Adapter


User manual

Cable USB 3.0 B – USB 3.0 A, 5Gb/s (Dion 1)

or

Cable USB 3.1 B – USB 3.1 A and USB Adapter A-C,
10Gb/s (Dion 2)

Hardware Setup

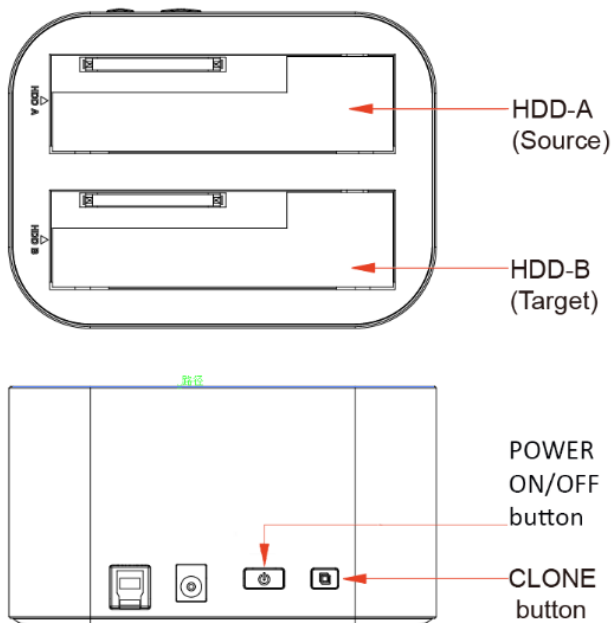

Device Mode (USB3.0 or USB3.1 to SATA External Dual Hard Drive)

- Install your SATA hard drive properly to the port connector on the docking station
- Connect the docking station to your computer by USB cable
- Connect the power adapter to the enclosure and power

- up the docking station
- The computer should now detect the new hardware .For Windows2000/XP/VISTA/7/8/10, no driver setup is necessary .
- Please Proceed to step 6.0 to format your drive.

Duplication Mode

Install 2 hard drives into the dock. Make sure to place the drive with the data you want copied (Source) into the "Source" bay. The target disk (Target) should be equal or larger in capacity than the source disk.

Connect the power adapter to the enclosure and press the POWER button to power up the docking station.

After about 10 seconds, Keep pushing the CLONE button for 3 seconds to begin duplication. Clone Progress indicator(25%,50%,75% and 100%,4 status) Would be acted. Show as below:

	LED Status			
Silkscreen	25%	50%	75%	100%
LED Color	Green	Red	Yellow	Orange
Duplication started	Solid LED for every 25%done incrementally			
Duplication in progress	LED moving back and forth			
Duplication Complete	All LED remain constantly on			

Note:

- Can't connect the docking station to your computer by USB cable for duplicator mode.
- A cloned drive also takes over the disk ID from the master drive. This causes Windows 7/8/10 to shut down one of the drives if both drives are placed into the HDD docking after cloning. The disk can be switched online again in the windows option "Disk Management".

Format your Hard Drive

(If the drive already appears in "My Computer", Please skip to step 2)

- 3) For an un-partitioned or un-formatted new drive , it normally does not automatically appear in "My Computer" the first time. Please follow these steps:
 - Windows 2000/XP/VISTA/7/8/10
 - Right key of Mouse select "My computer", Choose "Manager" choose "disk manager" of the list
 - The operating interface will show on the computer, Subarea Format following the operating interface.

Attention:

About Windows2000/XP/VISTA/7/8/10, Please choose NTFS Format, When the capacity is blow 32GD, You can choose FAT32 format.

- 4) Go to "My Computer", locate the removable disk, right click on it, and select "format" from the drop-down list, follow the instructions to complete the formatting process.

Note: By this method to format your drive it will result in a single partition in largest drive capacity, which is also highly recommended

FAQs:

Q: I can't find the drive under my computer, why?

A: Please make sure your new hard disk has been partitioned.

Q: After plugging the USB port, the drive is not spinning at all, why?

A: The USB cable doesn't connect successfully

Q: After installing the drive. Why it is still recognized as "Unknown device"

A: This means the driver installation is not successful, please install the driver one more time

Q: Can I use external USB hub?

A: Yes, USB hub works in the same way as the computer USB ports

Q: My computer doesn't have USB 3.0 port, Can I use USB 3.0 host adapter?

A: USB 3.0 host adapter works in the same way as the built-in USB ports.

The warranty DOESN'T APPLY to:

- using the device for other purposes than it was designed to
- installation of another firmware then the one that was installed as the original from the factory or firmware that can be downloaded manually or automatically from the device menu
- mechanical damage of caused by inappropriate using damage caused by the natural elements as fire, water, static electricity, overvoltage and so on
- damage caused by unauthorized repair
- damage of the guarantee seal or unreadable serial number of the device



Disposal: The symbol of crossed out container on the product, in the literature or on the wrapping means that in the European Union all the electric and electronic products, batteries and accumulators must be placed into the separate salvage after finishing their lifetime. Do not throw these products into the unsorted municipal waste

  **DECLARATION OF CONFORMITY**

Hereby, the company Abacus Electric, s.r.o. declares that the EVOLVEO Dion 1 and Dion 2 is in compliance with the requirements of the standards and regulations, relevant for the given type of device.

Find the complete text of Declaration of Conformity at
<ftp://ftp.evolveo.com/ce>

Copyright © Abacus Electric, s.r.o.
www.evolveo.com
www.facebook.com/EvolveoCZ

All rights reserved.
Design and specification may be changed without prior notice.